


Drainpipe Design)

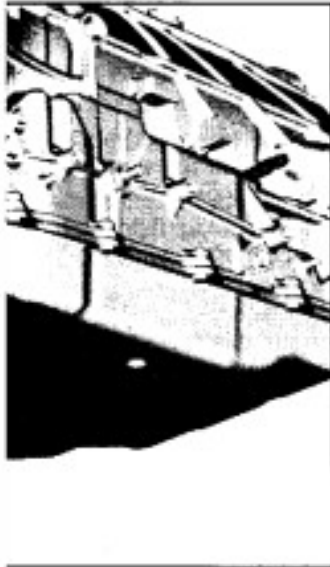

4572025

RWD transmission  
 Dexron® ULV transmission  
 per fluid may result in  
 internally.


**and the automatic  
 is hot due to the proximity  
 components. Always wear  
 personal injury.**

**fluid is flammable and the  
 transmission case plug**

**Note:**

- The quart containers of Dexron® ULV must be shaken to stir up the additives before pouring.
- When the oil level check plug is removed with the engine OFF, transmission fluid may drain from the hole.

1. Remove the oil level check plug.

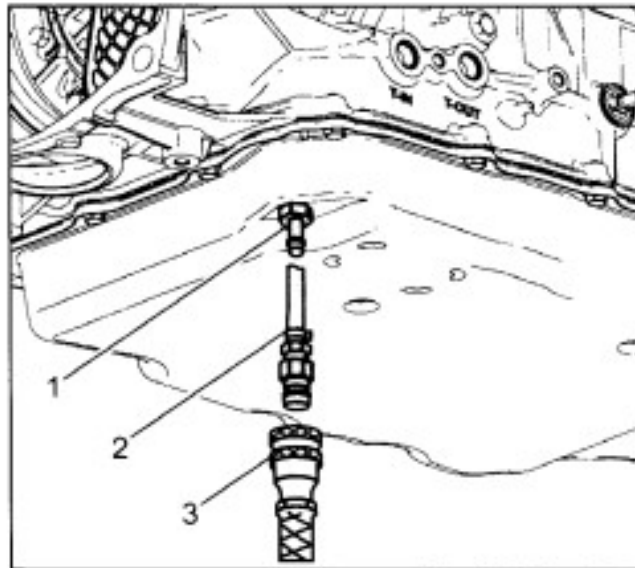

4571951

2. Install the DT-51190 fluid fill pan adapter (1) and, if necessary, one adapter from the DT 45096-30 cooler flush adapters (2).